




BC-3B




BC-3B with junction box

Installation dimension (mm)

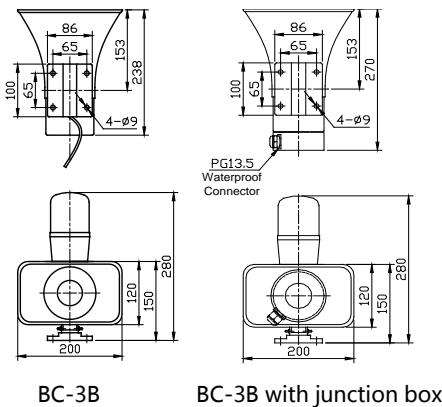

Wiring



Application

BC-3B beacon siren specially designed for construction machinery (traveling cranes, crawler crane, rubber tyred gantry crane), port machinery (gantry cranes, bridge cranes) etc hoist devise for visible & audible warning.

Major functions and features

- Visible & audible warning.
- Multiple alarm tones for selection.
- Visible alarm light uses long lifetime LED.
- Nice appearance, ease of use.
- Can connect to external junction box.

Specification

Supply voltage	AC220V/DC24V (other voltage can be customized)	Frequency	50Hz~60Hz
Tone	A/B/E (special tone or speech can be customized)	Speaker Power	10W
Color	Base: red Housing: red/yellow(special color can be customized)	Sound level	106db
Warning method	Visible & Audible	Speaker resistance	8Ω/16Ω
Ambient temperature	-30°C ~ +70°C	IP protection	IP65
Humidity	10% ~ 95% (no coagulation)	Weight	1.8kg
Material	Base : ABS Housing : PC		

Installation and operation

- Make sure the supply voltage whether can match the rated voltage.
- Mount to the mounting surface with M8 screws; make sure the mounting surface has enough strength to hold it.
- The speaker mouth upside down, at least the central axis of the speaker must parallel to the horizontal plane, in order to prevent rainwater resides at the horn.
- Connect "reserved cable" to the power cable.
- Turn on the power supply to activate this device.

Notice

- The part of material of products is PC(like lamp cover and lamp shell), so it cannot direct or indirect touch the organic solvent, such as industrial alcohol, banana oil, isopropyl alcohol, carbon tetrachloride, cyclohexanone and so on, otherwise, the product will be corrosion.
- Please read this manual before using this product.
- Don' t connect polarity reversed.
- Any questions in operation please contact us.
- The horn mouth can' t be face up.

Application

